

VariQuest[®]


Perfecta[®] STP Series




Perfecta[®] 2400PRO

Stand Assembly Instructions


1. Open the box and take out the screwdriver and screws

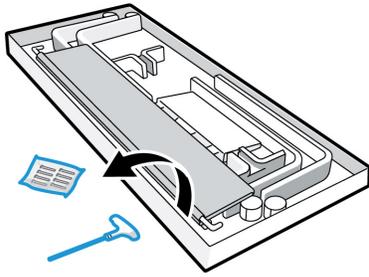


2. Locate the stand pieces. Identify the front legs and basket bars (outlined in blue)..

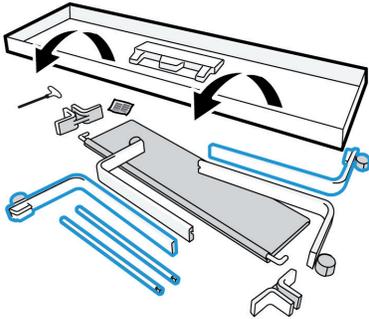


3. Insert the basket bars into the legs.

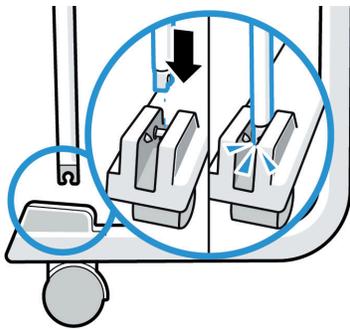


4. Attach the plastic dowels to the front legs.

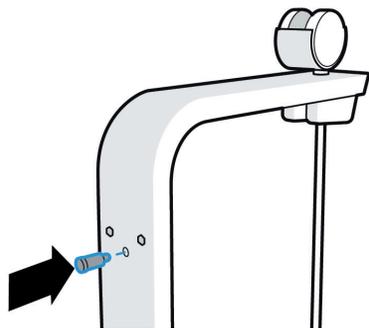


5. Position one front and one back leg side by side on the floor. Attach the T-shaped stand supports to the legs. The triangle must point towards the front of the stand (basket bar side). Important: Ensure it slots into place as shown.

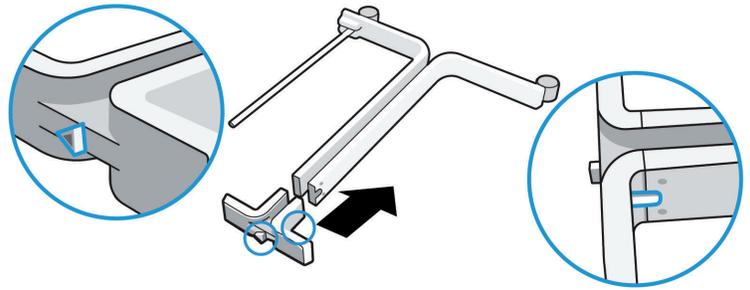


6. Open the stand basket fabric.

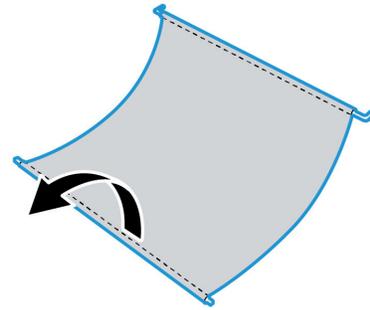


7. Insert the basket bar into the T-shaped support. Important: Ensure it slots into place as shown

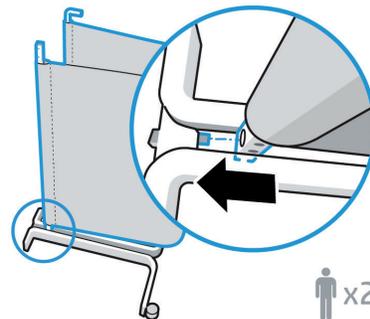


8. Fix the basket bar to the leg with 2 screws.

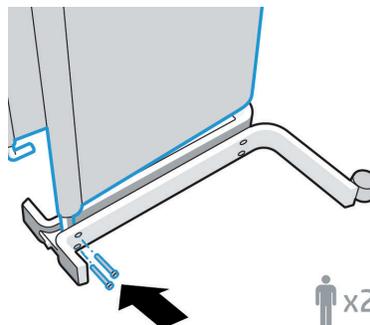


- 9.** Turn the stand upside down and insert the other side of the basket bar into the other T-shaped support. Important: Ensure it slots into place as shown.

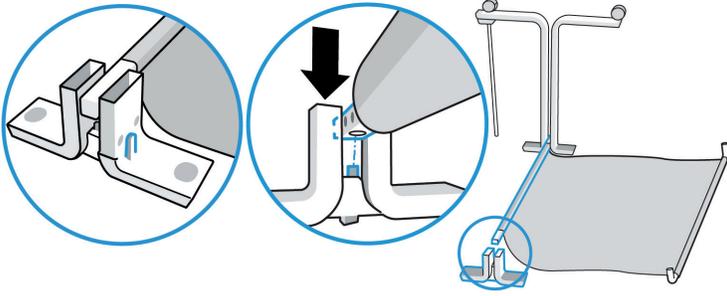


- 10.** Insert the legs of the other side of the stand. Important: Ensure they slot into place as shown.

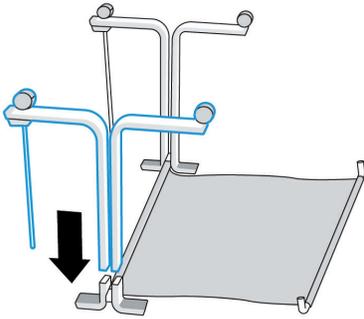


- 11.** Important: Check that the legs are correctly orientated with both basket bars on the same side. If not, go back to previous step.

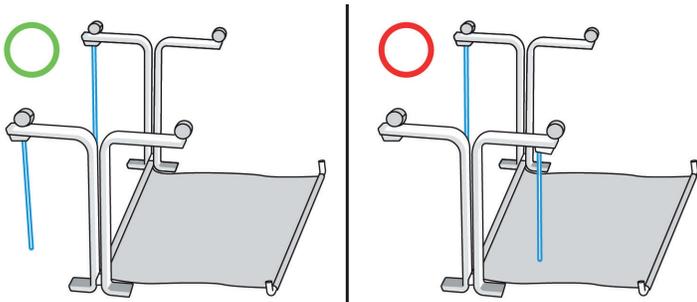


- 12.** Fix the basket bar to the legs with 2 screws.

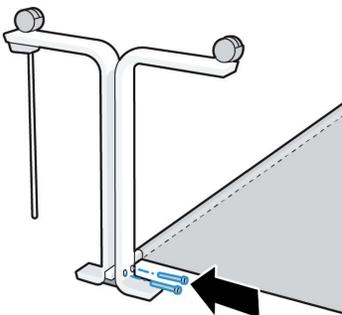


- 13.** Slide the bar into the legs until it rests on the dowels.

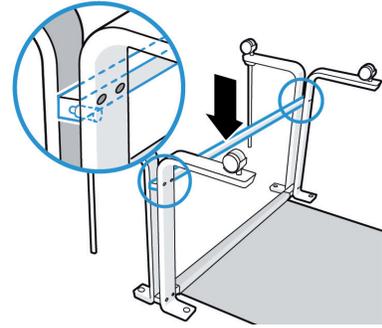


- 14.** Fix the bar to the legs with 4 screws. Caution: Ensure the screws connect the bar to the legs as shown. Important: Check all 4 screws are fully tightened.

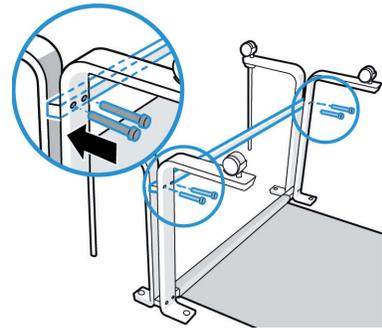


- 15.** Rotate the stand into the upright position.

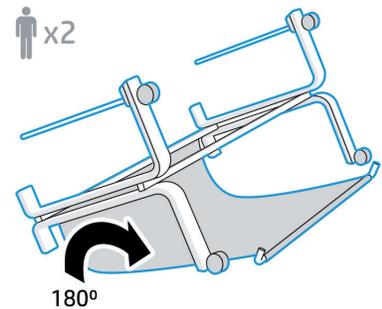


- 16.** Slot the basket bars into position on the legs.

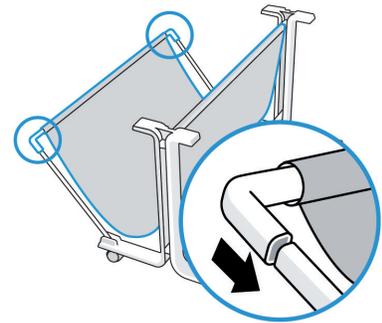


17. Attach the 8 screw cap covers.

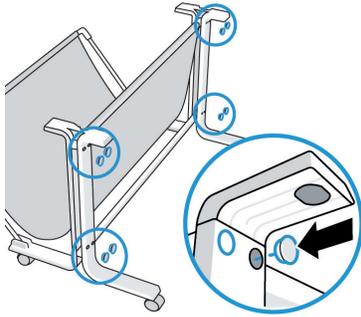


20. Place the printer on the stand.

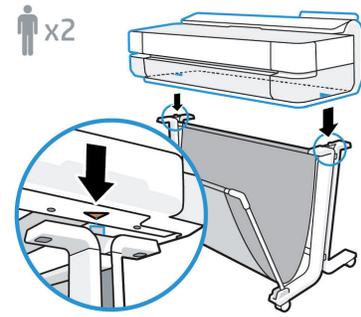


18. Place the printer and basket side by side with the front of the printer and stand in the same orientation. Important: If your printer has already been set up, do not turn it upside down.

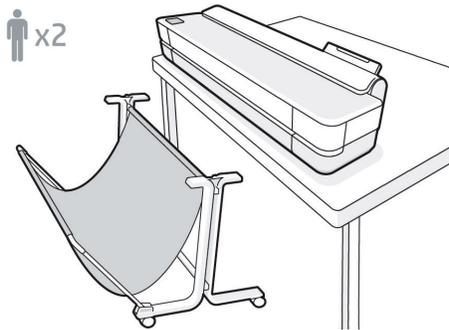

21. From underneath, fix the printer to the stand with 4 screws.

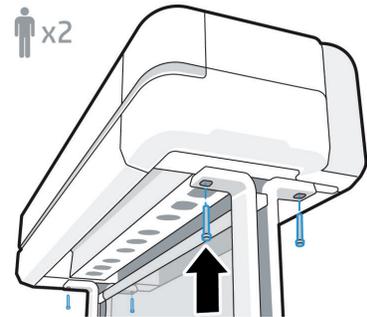

19. Check all 4 wheels are locked.

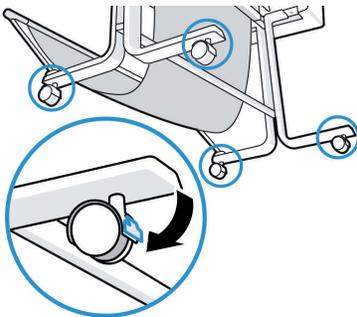

TECHNICAL SUPPORT

For technical assistance, please contact your Authorized VariQuest Dealer or the VariQuest Technical Support Team.

- Email: tech_support@VariQuest.com
- Phone: 1-800-328-0585