



VariQuest® Perfecta® 2400PRO Poster Design System




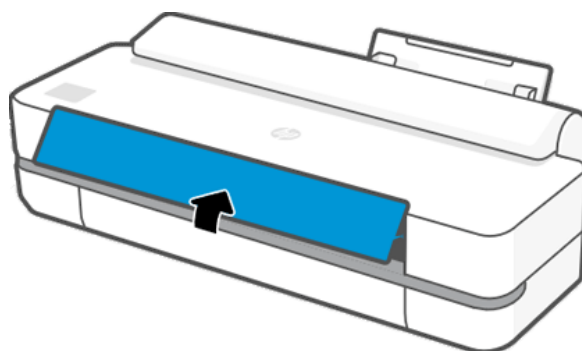
Printhead Installation Guide

When the printhead is out of ink or has an issue that cannot be fixed, you must replace it. After replacement, the printer will automatically perform a printhead alignment on the loaded paper.


TIP: If you would like to perform the printhead alignment on a different paper (perhaps from the multi-sheet tray), you could change the paper before starting this procedure. Plain white paper is recommended. A4 and letter paper should not be loaded in landscape orientation.

INSTRUCTIONS


1. Make sure the printer is turned on.
2. If your printer is on a stand, make sure the printer wheels are locked (the brake lever is pressed down) to prevent the printer from moving.
3. From the front panel, tap  >
Printer Maintenance > Replace Printhead.
4. From the front panel, tap **Continue** to proceed.
5. Open the main door.





6. Press in each ink cartridge to unlock it.

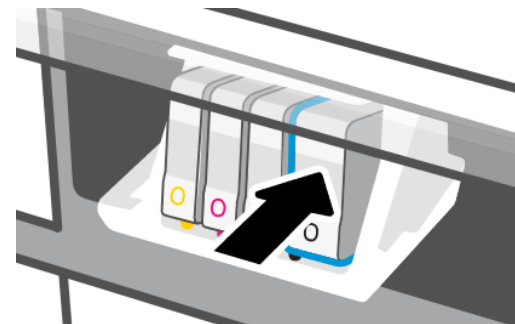


7. Remove all the ink cartridges, then tap **Next**.

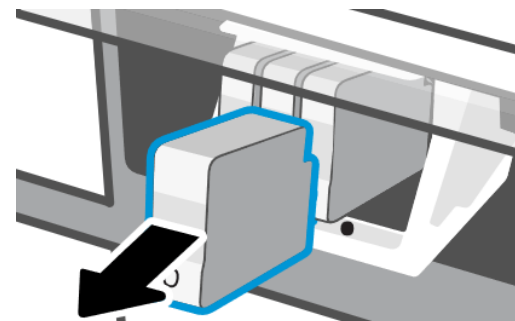


8. Open the printhead latch.

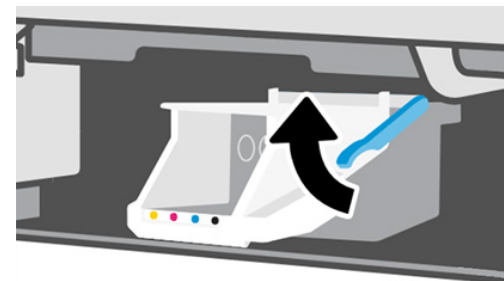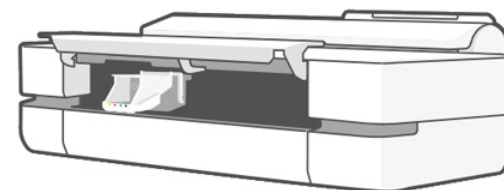


9. Remove the printhead, keeping it vertical to avoid getting ink on the connections.

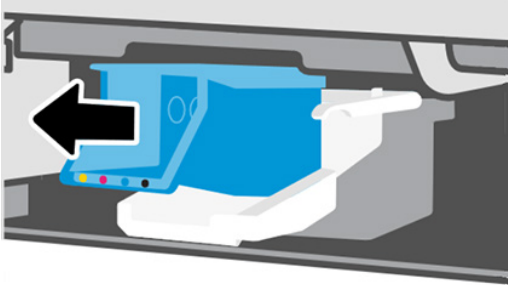

10. Insert the new printhead.

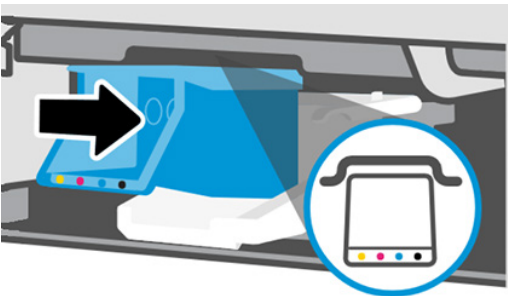


11. When finished, close the latch and tap **Next**.

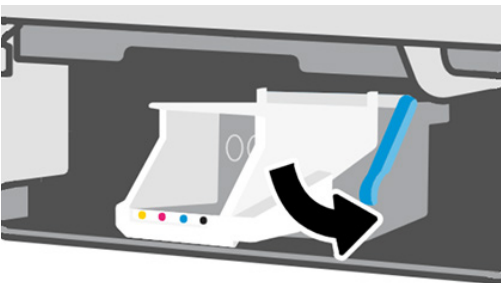


12. Insert the ink cartridges. Make sure that you insert each ink cartridge into the slot that has the same colored label as the ink cartridge you are installing.

IMPORTANT: If the printhead is new, install new ink cartridges. New ink cartridges are required for successful printhead replacement.

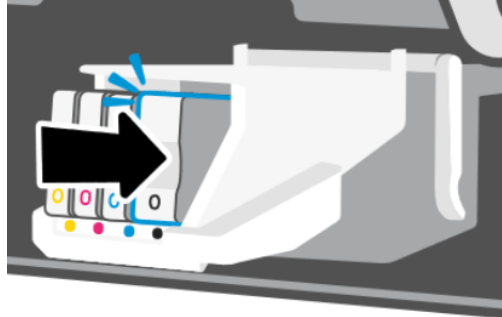

13. Close the main door.

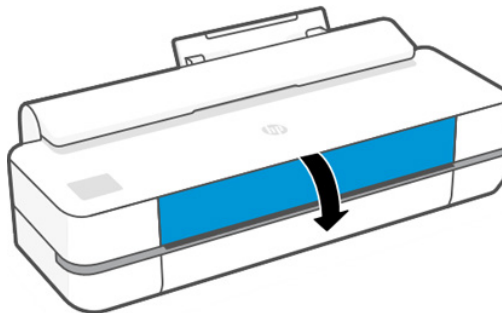

14. The front panel recommends a printhead alignment.

CAUTION!

Keep out of reach of children. Avoid contact with eyes. Ink may be harmful if swallowed.

This product has a limited warranty. Printhead: One year from date of installation, or 4000 ml of VariQuest ink have been cycled through the printhead, whichever occurs first. If product is defective, contact your authorized VariQuest Dealer or Varitronics Technical Support before the end of the warranty date. Warranty does not cover empty or refilled products, or products that have been tampered with or misused.

TECHNICAL SUPPORT

For technical assistance, please contact your Authorized VariQuest Dealer or the VariQuest Technical Support Team.

- Email: tech_support@VariQuest.com
- Phone: 1-800-328-0585